



USE OF UNDERDRAIN WITH SHATTERED ROCK SUBGRADE

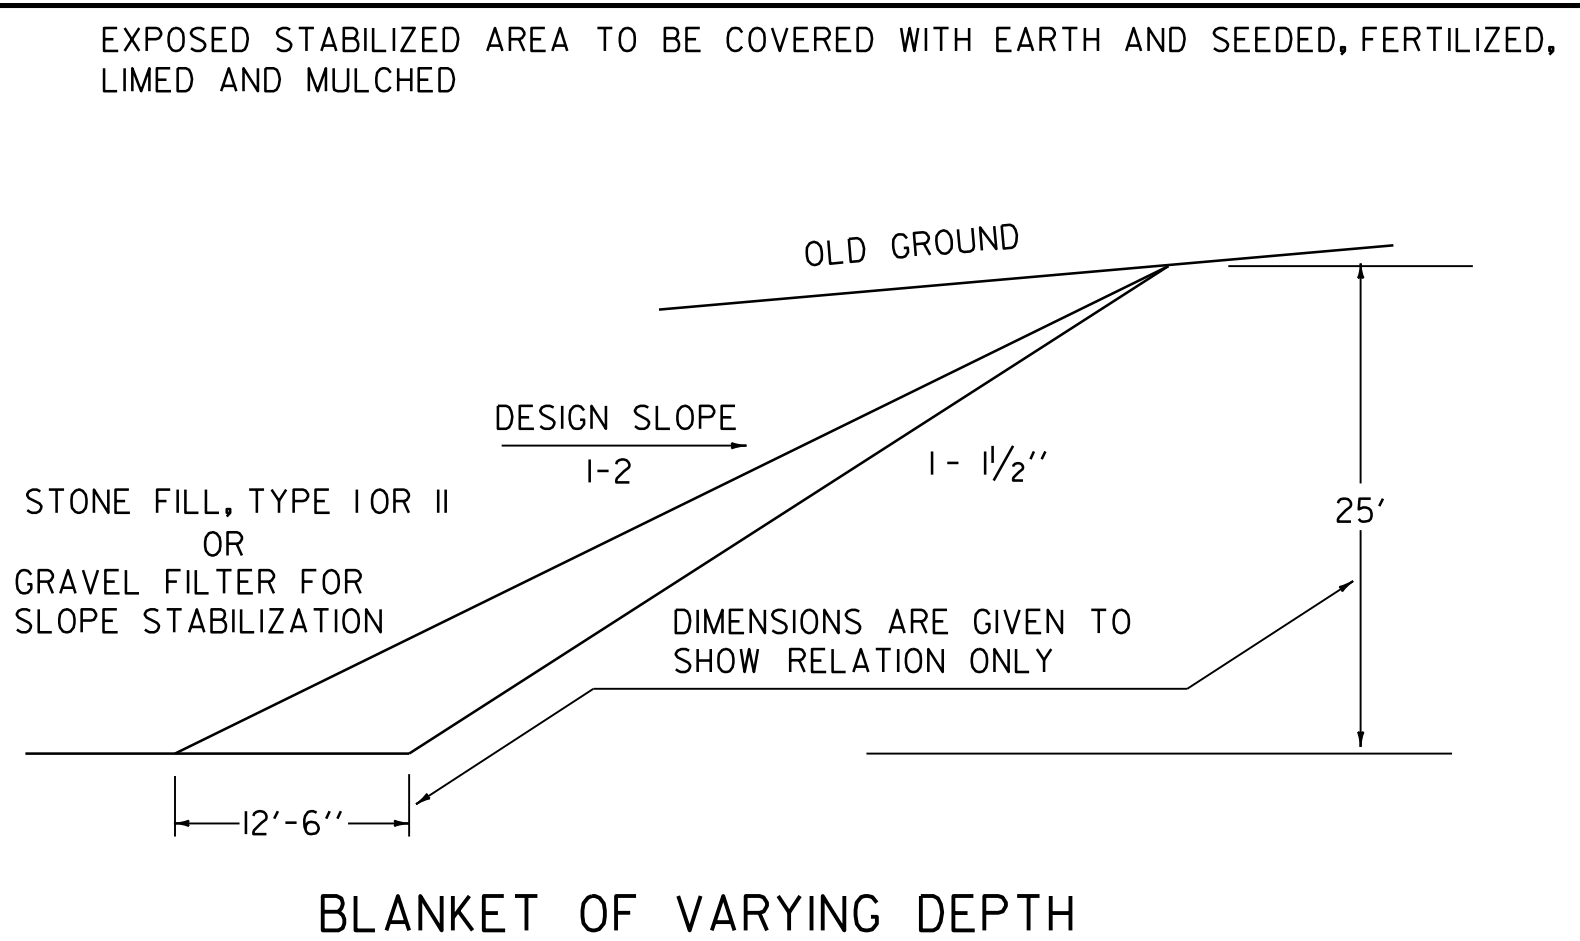


BLANKET OF VARYING DEPTH

BLANKET OF STONE FILL, TYPE I OR II OR BLANKET OF GRAVEL FILTER FOR SLOPE STABILIZATION

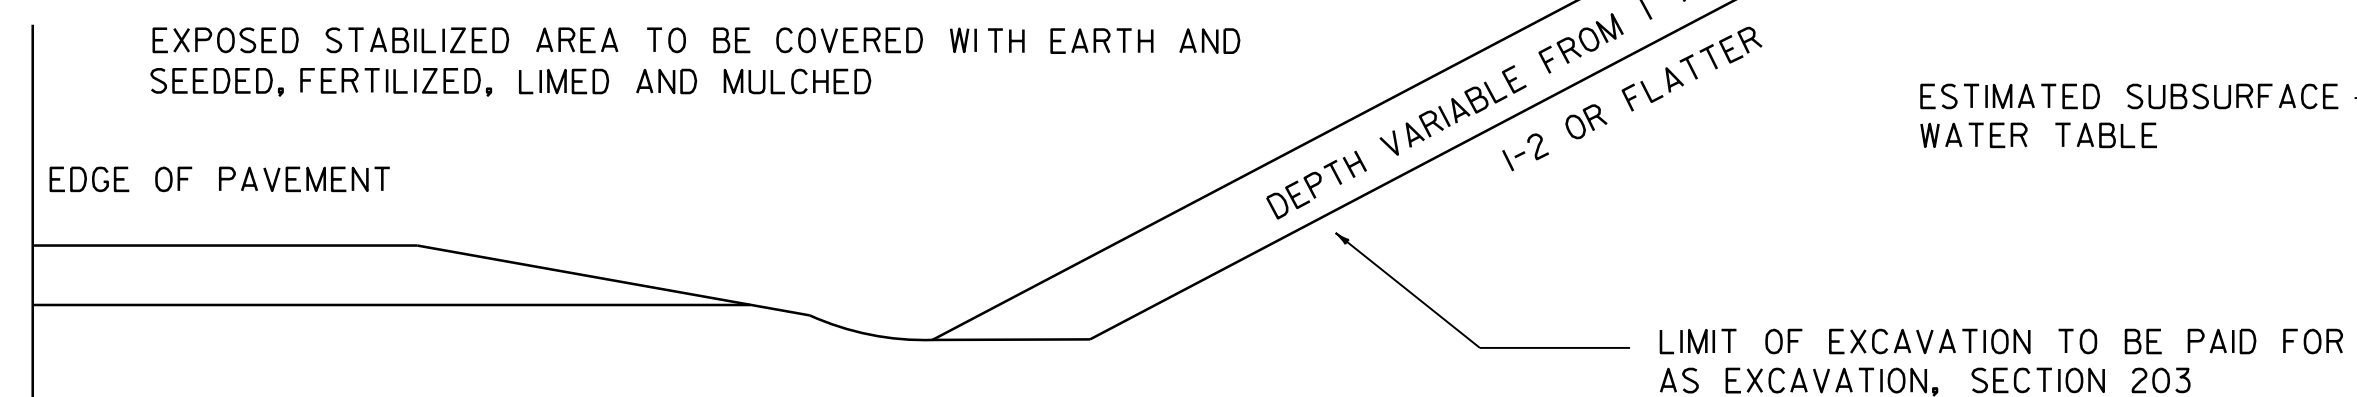


BLANKET SLOPE STABILIZATION METHOD

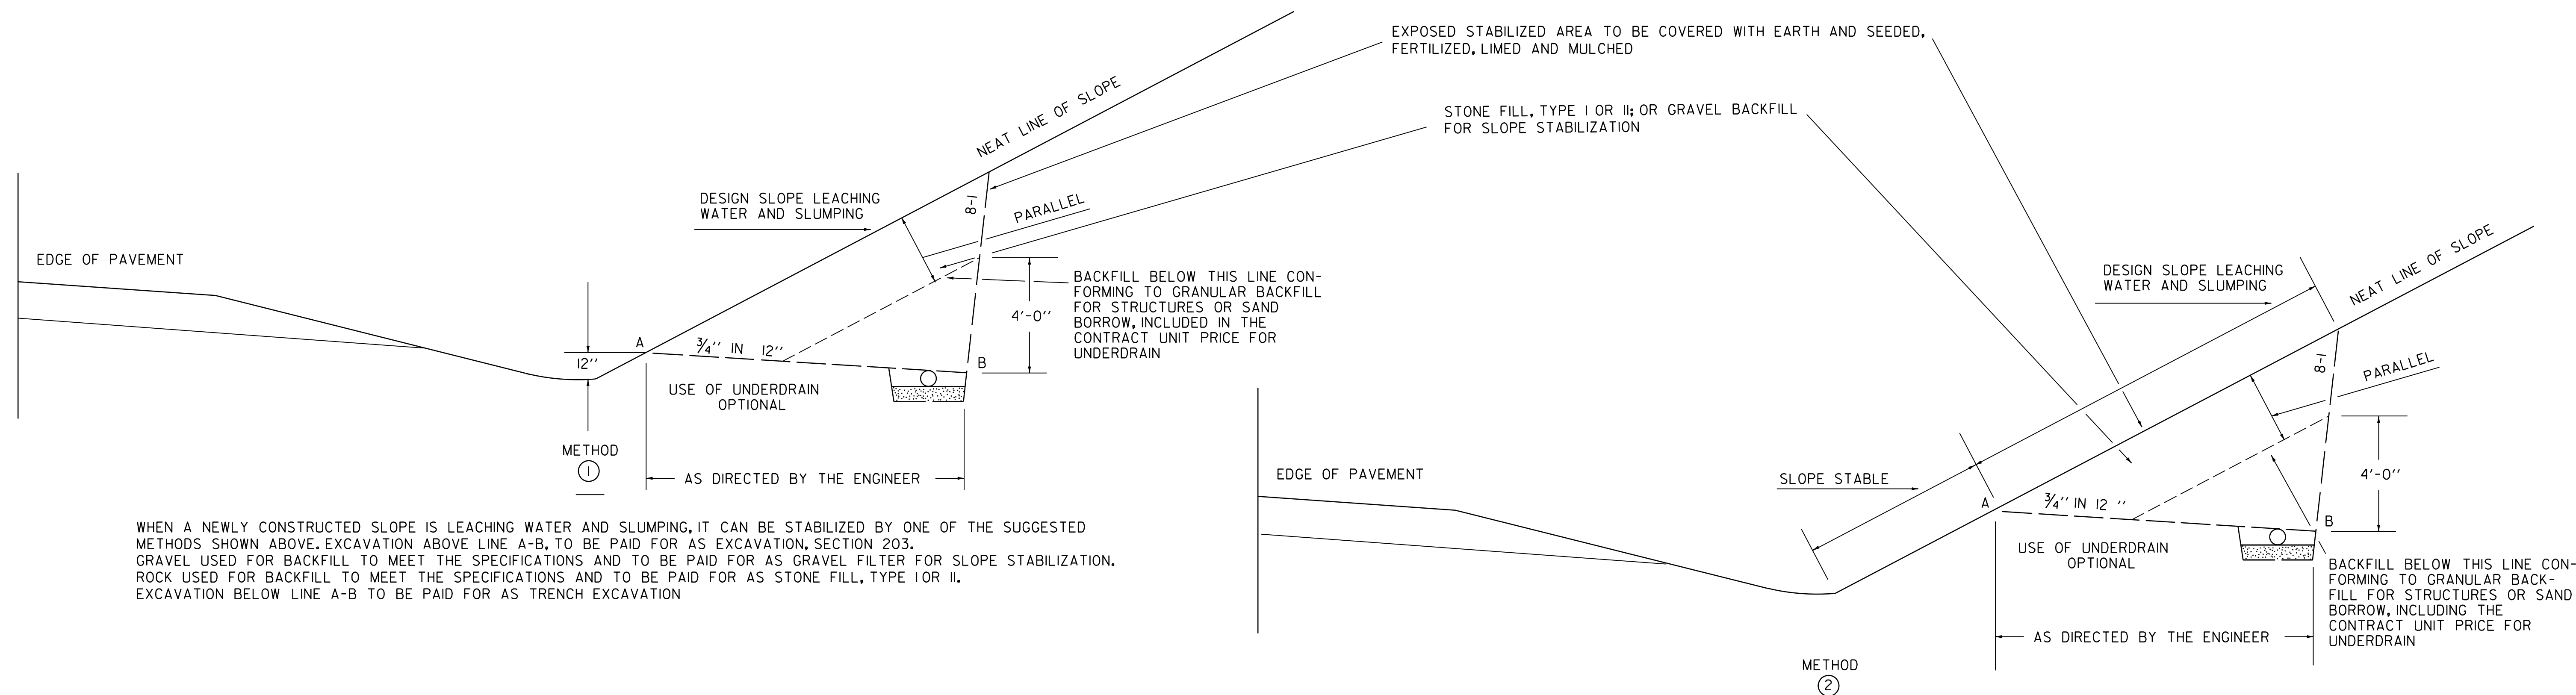

WHEN A NEWLY CONSTRUCTED SLOPE IS LEACHING WATER AND SLUMPING, IT CAN BE STABILIZED BY ONE OF THE SUGGESTED METHODS SHOWN ABOVE. EXCAVATION ABOVE LINE A-B, TO BE PAID FOR AS EXCAVATION, SECTION 203. GRAVEL USED FOR BACKFILL TO MEET THE SPECIFICATIONS AND TO BE PAID FOR AS GRAVEL FILTER FOR SLOPE STABILIZATION. ROCK USED FOR BACKFILL TO MEET THE SPECIFICATIONS AND TO BE PAID FOR AS STONE FILL, TYPE I OR II. EXCAVATION BELOW LINE A-B TO BE PAID FOR AS TRENCH EXCAVATION

REV.	DATE	DESCRIPTION
0	DEC. 6, 1971	ORIGINAL APPROVAL
1	DEC. 12, 1974	STONE FILL ADDED FOR STABILIZATION
2	JUN. 1, 1994	REISSUED, WITHOUT CHANGE, NEW SIGNATURES
3	JUN. 25, 2024	MISC. REVISIONS, BORDER UPDATE
OTHER STANDARDS REQUIRED:		
VTRANS AND FHWA APPROVAL ON FILE WITH CONTRACT ADMINISTRATION		

USE OF UNDERDRAIN WITH SHATTERED ROCK SUBGRADE METHODS OF SLOPE STABILIZATION

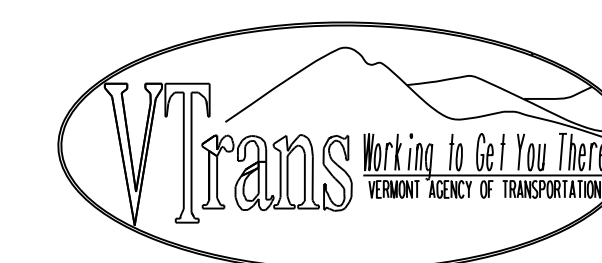

STANDARD
B-11