



∠ 2" MINIMUM SOD THICKNESS

BY THE ENGINEER.

-2" TOPSOIL WHEN DIRECTED

ALL SOD JOINTS TO BE STAGGERED.

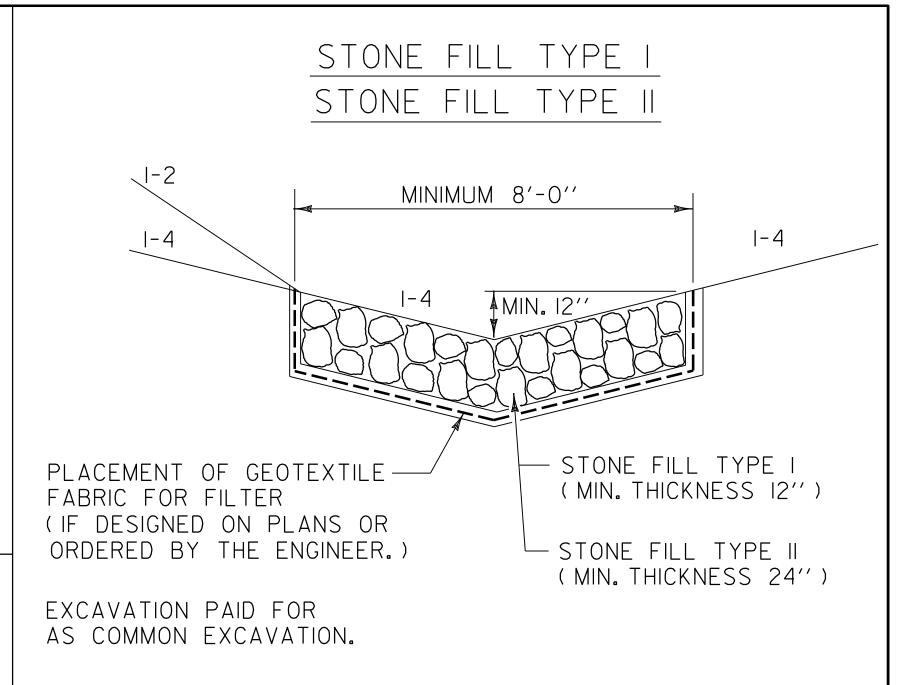


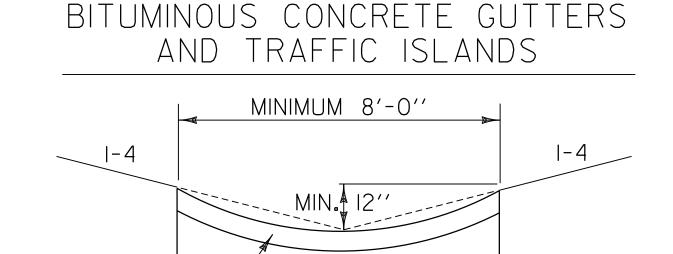


2" BITUMINOUS CONCRETE APPLIED
IN TWO COURSES.

— 6" DEPTH OF GRAVEL OR
SAND IF DIRECTED BY THE ENGINEER.

PORTLAND CEMENT CONCRETE GUTTER

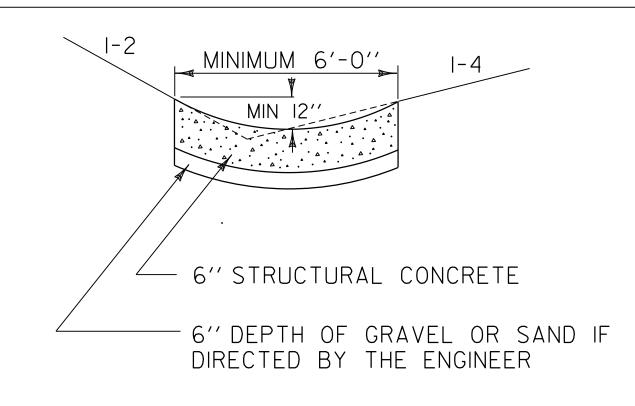

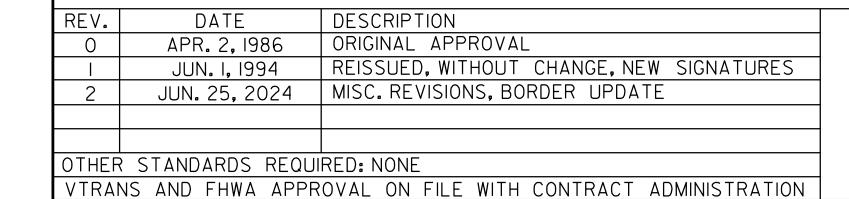

TREATED GUTTERS



STANDARD

